



SYSTEM & PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems



PERFORMANCE WARRANTY

KEY FEATURES



10BB Half-cut Cell Technology

New circuit design, lower internal current, lower R_s loss
Ga doped wafer, attenuation $<2\%$ (1st year) / $\leq 0.55\%$ (Linear)



Significantly Lower the Risk of Hot Spot

Special circuit design with much lower hot spot temperature



Lower LCOE

2% more power generation, lower LCOE



Excellent Anti-PID Performance

2 times of industry standard Anti-PID test



IP68 Junction Box

High waterproof level



ELECTRICAL CHARACTERISTICS

T	M	T	NM T	T	NM T	T	NM T	T	NM T	T	NM T
530	395	535	398	540	402	545	406	550	410		
41.32	38.60	41.48	38.70	41.64	38.80	41.80	39.00	41.96	39.10		
12.83	10.24	12.90	10.30	12.97	10.36	13.04	10.41	13.11	10.47		
49.32	46.40	49.46	46.50	49.60	46.70	49.76	46.80	49.92	47.00		
13.72	11.06	13.79	11.12	13.86	11.17	13.93	11.23	14.00	11.28		
20.50		20.70		20.90		21.10		21.30			

MECHANICAL CHARACTERISTICS

Monoco	
144pcs	
22.8*1134*35mm (8.969*44.65*1.38inches)	
28g (61.73lbs.)	
3.2nm AR Coating Tempered Glass	
Anodized Aluminium Alloy	
IP68, 3 Bypass Diodes	
4mm ² (IEC), 12AWG(UL)	
350mm(+),250mm(-) or Customized Length	
T0 /LJQ-3-CSY/MC4/MC4-EV02	

I-V CURVE

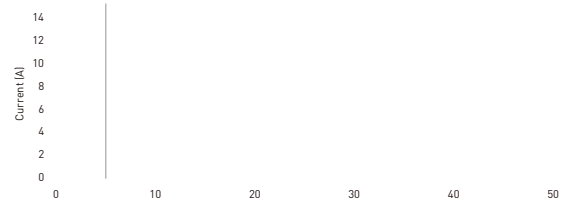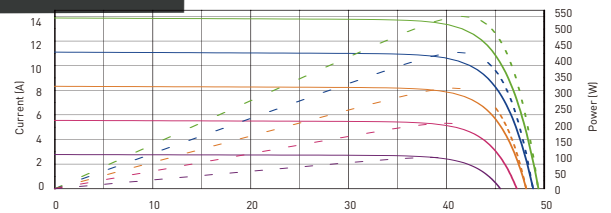

APPLICATION CONDITIONS

1000V/1500V/DC	
-40°C~+85°C	
25A	
Class II	

TECHNICAL DRAWINGS

TEMPERATURE CHARACTERISTICS

T	ff i f	-0.35%/°C
T	ff i f	-0.26%/°C
T	ff i f l	+0.048%/°C
N i L M l i		
T (NM T)		43±2°C

PACKING CONFIGURATION

i ll	31	31(USA)
i i (4 'H)	620	620



Talesun is a leading manufacturer of solar panels, providing high-quality, reliable products for residential and commercial applications. Our panels are designed for maximum efficiency and durability, ensuring long-term performance in various weather conditions. We offer a wide range of panel sizes and configurations to meet your specific needs. Contact us today for more information and to request a quote.