



BISTAR

TP7F54M
TP7F54M(H) **108-cell**

395 - 415W

10BB PERC



体系及产品认证


- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015
- ISO 14001: 2015
- ISO 45001: 2018



质量保证

12

25

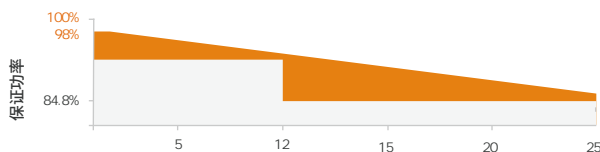

产品特性



10BB半片电池技术

2%

0.55%



显著降低热斑风险



更一度电成本

2%



优秀的抗PID性能

PID
85 / 85% RH 192



IP68接线盒

| | | | | | |
|--|-------|-------|-------|-------|-------|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | 20.20 | 20.50 | 20.70 | 21.00 | 21.30 |

| | |
|--|--|
| | 10BB |
| | 108 (6*18) |
| | 1722*1134*30mm (67.80*44.65*1.18) |
| | 21.5kg (47.4lbs.) |
| | |
| | |
| | IP68, 3 |
| | 4mm ² (IEC), 12AWG(UL) 350mm(+),250mm(-) |
| | T01/LJQ-3-CSY/MC4/MC4-EVO2- 4 |