



# BIPRO

FD6160M **120-cell**

360 - 380l

9BB


PERC



- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系



12 30

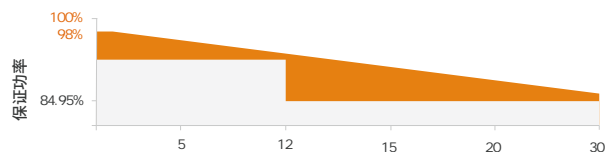

9BB

2% 0.45%



5%-25%



PID

85 /85% RH 192



IP68



	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
(P <sub>s</sub> /I)	360	268	365	271	370	275	375	278	380	282
(H <sub>bb</sub> /H)	34.3	31.6	34.6	31.9	34.9	32.1	35.2	32.3	35.5	32.6
(I <sub>bb</sub> /A)	10.50	8.46	10.56	8.50	10.61	8.55	10.66	8.60	10.71	8.64
(HaU/H)	40.7	37.9	40.9	38.0	41.1	38.2	41.3	38.4	41.5	38.6
(IeU/A)	11.15	9.00	11.20	9.04	11.26	9.09	11.31	9.13	11.37	9.17
(%)	19.80		20.00		20.30		20.60		20.90	

EFC : 1000l / \_ , AM1.5, 25 Op+5l f 3%  
 NMOF( ) 800l / \_ , AM1.5 20 1\_ / e

( 375W )

	5%	10%	15%	20%	25%
(P <sub>s</sub> /I)	394	413	431	450	469
(H <sub>bb</sub> /H)	35.2	35.2	35.2	35.2	35.2
(I <sub>bb</sub> /A)	11.19	11.73	12.26	12.79	13.33
(HaU/H)	41.3	41.3	41.3	41.3	41.3
(IeU/A)	11.88	12.44	13.01	13.57	14.14

	9BB
	120 (6*20)
	1755*1038*30_ (69.09*40.87*1.18 )
	23.5] Y (51.8Te)
	2.0_ _
	2.0_ _
	IP68 3
	4_ _ , (IEC), 12AI G(GL) 300_ _
	F01/LJQ-3-CEK/MC4/MC4-EHO2

	1500H/DC
	-40, Cp+85, C
	25A
	C'See
	5400PS 2400PS
	70% f 5%

P <sub>s</sub> /I	-0.36% /, C
HaU	-0.26% /, C
IeU	+0.043% /, C
NMOF	43f 2, C

	36	36(GEA)
(40'HC)	936	792

I-V

